


# UNITECH EVO 358C



## FEATURES

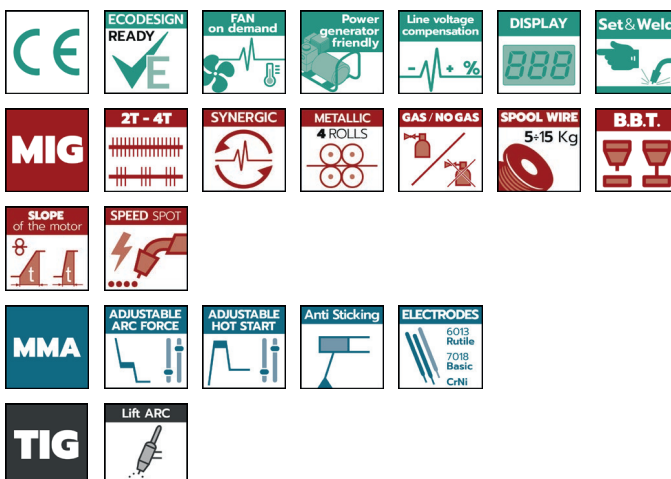

## TECHNICAL DATA

Input Voltage
Power 60%
No load voltage $U_0$
Amp Min-Max
Duty Cycle 40°
Insulation class
Protection degree
Dimensions (LxWxH)
Weight box/net

## UNITECH EVO 358C

(3ph) · 400V ± 10% · 50/60 Hz		
MIG	MMA	TIG
12,1 KVA	10,3 KVA	9,4 KVA
45 V	60 V	12 V
30 ÷ 350 A	20 ÷ 300 A	10 ÷ 350 A
350A @ 50% 320A @ 60% 280A @ 100%	300A @ 50% 280A @ 60% 250A @ 100%	350A @ 50% 320A @ 60% 280A @ 100%
H		
IP 23S		
440x930x840 mm		
56,0 / 53,00 kg		

## STANDARD CONFIGURATION

<b>99825019K</b>	<b>UNITECH EVO 358C · H<sub>2</sub>O</b>
99825015	Power source
99490032K	Cooler unit UNITECH + tank CL 500 · 5 kg
33805101	Drive roll · Ø 30 mm · 0,8 - 1,0 mm